


Biamp TesiraForte DSP and Dante Programming / Configuration Requirements:

1. All Biamp TesiraForte DSP must be model TesiraForte DAN CI.
2. All mixers must be updated with the newest version of firmware provided by Biamp.
3. All mixers must be configured with the newest version of software provided by Biamp.
5. Each courtroom shall have a dedicated RJ45 CAT6 connection wired to the Dante output port of the Biamp TesiraForte DAN CI configured for 6 outputs and 2 inputs as per attached diagram.

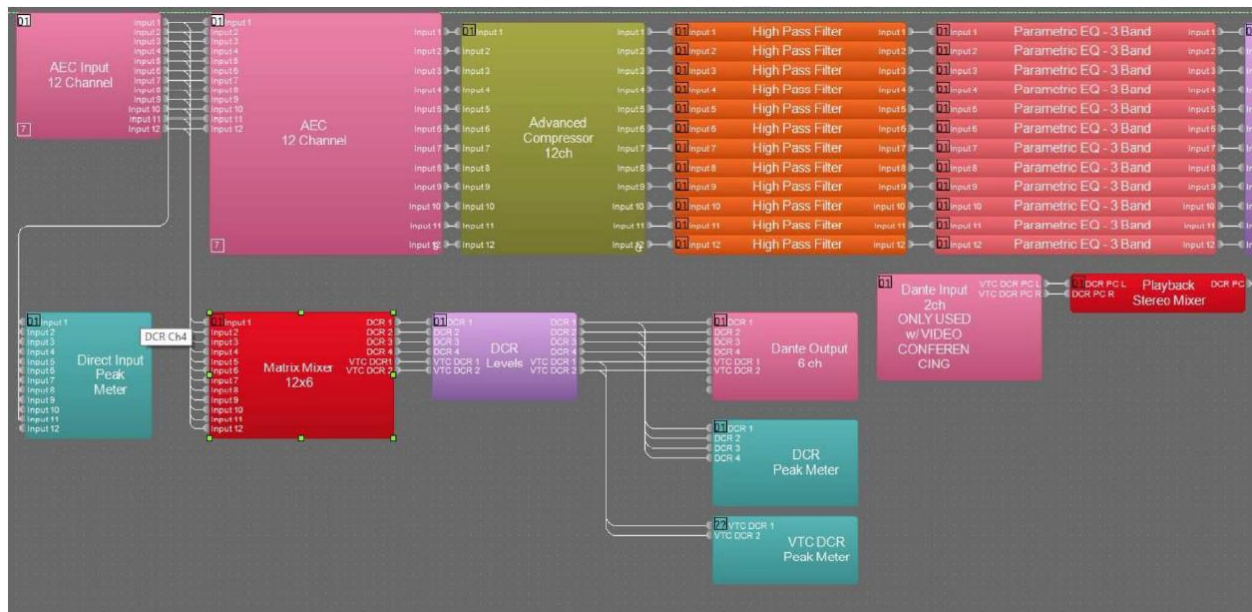

6. Dante outputs 1 through 4 shall be labeled DCR1 through DCR 4. Dante outputs 5 and 6 shall be labeled VTC DCR 1 and VTC DCR 2. Dante inputs 1 and 2 shall be labeled VTC DCR PC L and VTC DCR PC R. The VTC outputs and inputs shall only be used in courtrooms that have Video Conferencing capability.