

SHADOW MOLDING WALL
ANGLE MOUNTED DETAIL

NOT TO SCALE



WALL ANCHORED TYP. DETAIL

NOT TO SCALE



LAMP SUPPORT TYPICAL DETAIL

NOT TO SCALE



CROSS "T" TYPICAL DETAIL

NOT TO SCALE

SUSPENDED CEILING TYPICAL DETAILS

NOT TO SCALE

General Notes:

ALL CEILING SYSTEM SHALL BE NEW AS SPECIFICATION IN THIS SHEET.
AIR CONDITIONERS SHALL BE REINSTALLED BEFORE CEILING INSTALLATION.
ALL WALL THAT BE ERECTED UNTIL CEILING SLAB SHALL BE INSTALLED FIRST.
ALL WALLS SHALL BE PAINTED BEFORE INSTALL THE SUSPENDED CEILING.

AIR CONDITIONER NOTE:

THE AIR SUPPLY IS SHOWN IN THIS PLAN FOR CEILING INFORMATION ONLY,
MECHANICAL WORK IS NOT INCLUDE IN THIS PROJECT.

CONSTRUCTION NOTE:

1.-THE FISSURED SHALL BE:

-LAY-IN TYPE.
-5/8"x24"x24".
-WHITE COLOR.
-SHADOWLINE TAPERED EDGE.

2.-ALL CEILING LAMP SHALL BE:

-ELECTRONIC BALLASTS DESIGNED FOR T8 LAMPS.
-3" DEEP CELL PARABOLIC SCREEN.
-COLOR "SILVER REFLECTOR.
-24"x24" FULL SIZE.
-LAMP COLOR 741.
-LAMP TYPE: FB32-6"U
-9 CELL MODEL.

3.-THE HUNG CEILING FRAMING SHALL BE:

-WHITE COLOR.
- 7/8" SIZE.
- INSTALL 8'-3" HEIGHT FROM FINISH FLOOR.

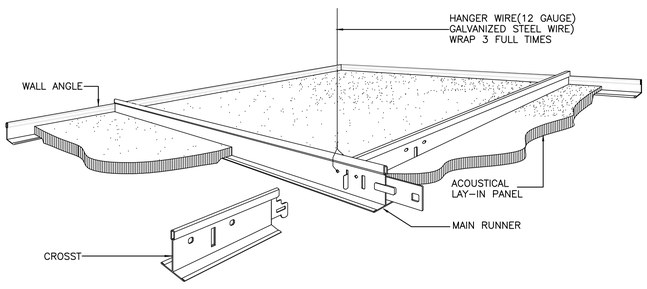

ACOUSTICAL HUNG CEILING
ASSEMBLY DETAIL-ISOMETRIC VIEW

NOT TO SCALE

OAT

REVISIONS

NO.	DESCRIPTION	DATE	BY

TRIBUNAL GENERAL DE JUSTICIA
OFICINA DE ADMINISTRACION DE LOS TRIBUNALES
DIRECTORIA DE ADMINISTRACION
OFICINA DE ADMINISTRACION Y CONSERVACION DE LOCALES

APPROVED DATE: PROJECT APROVED DATE:

APPROVED BY:
ENCARGADO DEL AREA

APPROVED SIGN: _____

PROJECT NAME: NUEVA OFICINA
PROJECT LOCATION: TRIBUNAL SUPREMO
DRAWING DESCRIPTION: CELING DETAIL

GERENTE DE PROYECTO: PROJECT MGR.
ESPEC. EN ADMINIST.: ESPECIALISTA:
CHECKED BY: ING. DANIEL PADILLA
DRAWING BY: P.MORALES
FILE NAME:

PROJECT DATE: 04-FEBRERO-2026
PRINTING DATE: 04-FEBRERO-2026
DRAWING SCALE: DWG. SCALE:

SHEET NO. A-09
OF: NO.